

Pince de préhension électrique - Large

Long-Stroke Gripper RCP2 -GRST


www.rosier.fr



Features

1 Long Strokes up to 100mm (50mm on each side)

The long-stroke actuator can support works of significantly varying sizes and shapes. Four standard strokes of 40mm, 60mm, 80mm and 100mm are available.



2 High Gripping Forces up to 40N

With the standard type, the maximum gripping force is 40N, which is twice the maximum gripping force of the GRS gripper.


3 High-Speed Specification with Higher Opening/Closing Speeds

You can select a desired model from the two types of the viewpoint of opening/closing speed: the high-speed type whose max opening/closing speed is 75mm/s, or the standard type whose max opening/closing speed is 34mm/s.



4 Selectable Cable Exit Direction

The cable exit direction is selectable. Choose either a side exit or a bottom exit.



Pince de préhension électrique - Large

Long-Stroke Gripper RCP2 -GRST

www.rosier.fr

Model Designation

RCP2 - GRST - I - 20P - 2 - [] - P1 - [] - []

Series	Type	Encoder Model	Motor Type	Gear Ratio	Open/Close Stroke (Total Stroke)	Applicable Controller	Cable Length	Option
RCP2	GRST : Long-Stroke Type	I: Incremental	20P: Pulse Motor, Size □	2: Standard Type 1: High-Speed Type	40: 40mm 60: 60mm 80: 80mm 100: 100mm	P1: PCON PSEL RPGON	N: None P: 1m S: 3m M: 5m X□: Specified Length	NM: Reversed-Home Specification A0: Bottom Cable Exit A1: Side Cable Exit

*Be sure to specify "A0" or "A1" as the cable exit direction.

Models

Type	Model
Standard Type	RCP2-GRST-I-20P-2-40-P1-①-②
	RCP2-GRST-I-20P-2-60-P1-①-②
	RCP2-GRST-I-20P-2-80-P1-①-②
	RCP2-GRST-I-20P-2-100-P1-①-②
High-Speed Type	RCP2-GRST-I-20P-1-40-P1-①-②
	RCP2-GRST-I-20P-1-60-P1-①-②
	RCP2-GRST-I-20P-1-80-P1-①-②
	RCP2-GRST-I-20P-1-100-P1-①-②

*In the above model names, [1] indicates the cable length and [2] indicates the options.


Cables

Type	Model
Standard Type (Robot Cable)	P (1m)
	S (3m)
	M (5m)
Special Length	X06 (6m) ~X10 (10m)
	X11 (11m) ~X15 (15m)
	X16 (16m) ~X20 (20m)

*The standard integrated motor/encoder cable is a robot cable.
*Replacement Cable Model: CB-PCS-MFA□□□ (□□□ indicates cable length. Example: 030 = 3m)

Adjustment of Gripping Force

You can freely adjust the gripping force according to the applicable push-motion operation within a range of 20 to 70% in controller current-limiting values. (See graph below)

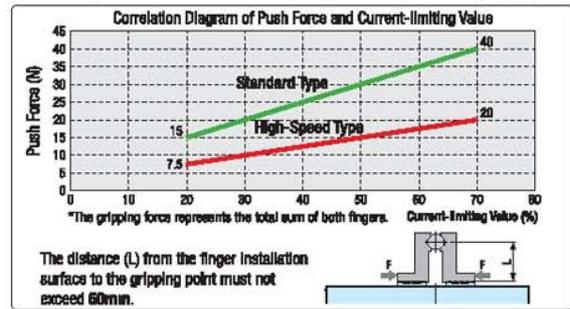


Specifications

Specs	Specifications	
	Standard Type	High-Speed Type
Open/Close Stroke (Total) (mm)	40 / 60 / 80 / 100	
Max Gripping Force (N)	40	20
Max Open/Close Speed (mm/s)	34 (each side)	75 (each side)
Positioning Repeatability (mm)	±0.01	
Backlash (mm)	0.2mm Max each side	
Static Allowable Moment (N·m)	Ma: 2.93 Mb: 2.93	Mc: 5.0
Actuator Mass	Refer to the table under External Dimensions	
Applicable Controllers	PCON / PSEL / RPGON (ROBONET)	

- The precision of the relationship between push force (gripping force) and current-limiting value is not guaranteed. The above graph should be used only as a guide.
- Take note that if the push force is too small, the push force may vary or malfunction may occur depending on the slide resistance, etc. Make sure the current-limiting value is set to 20% or above.
- Keep the fingers as small and light as possible. If the fingers are long and large or heavy, the performance may drop or the guide may be negatively affected.

External Dimensions

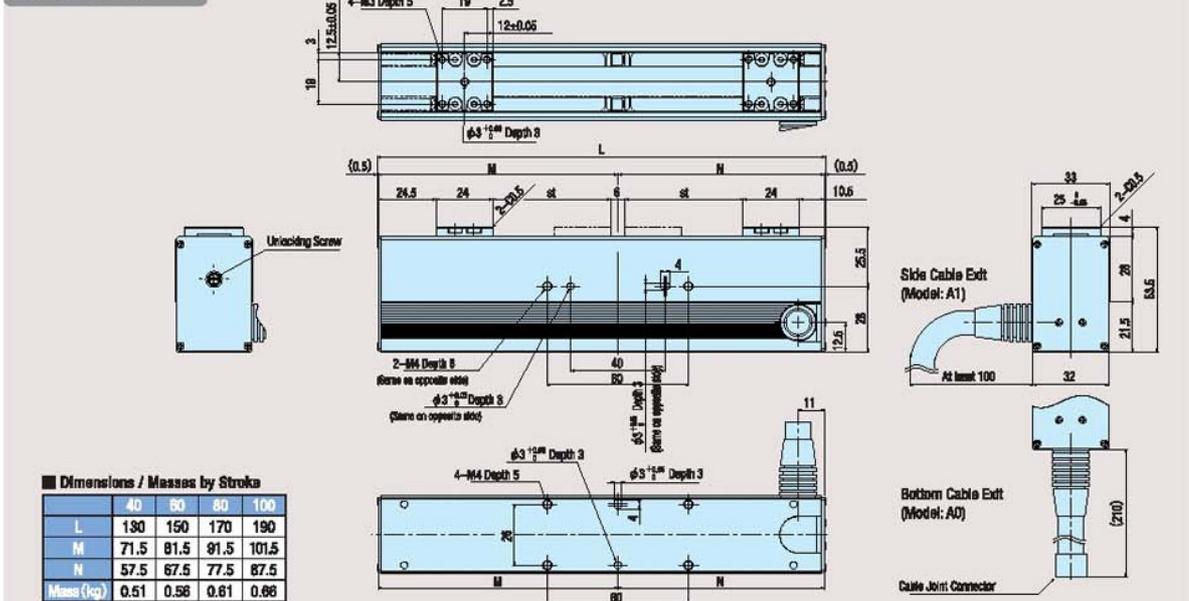



13 rue Sigmund Freud
69120 Vaulx en Velin
Tél. : 04 72 04 68 61

contact@rosier.fr

www.rosier.fr

Agence Paris

Tél. 01 30 25 12 02

Fax 01 30 25 12 27

