

NEW

*IP68 marine-grade
option for wet and
salty environments*



H-Track

Electro-Hydraulic Linear Actuator

Featuring Power Density and Shock Load Resistance



H-Track – A Compact Hybrid of Superior Performance

H-Track electro-hydraulic actuators provide the high load performance of hydraulics without the expansive space requirements nor the prohibitive cost of full-sized, fluid-based systems.

More Power in Less Space

H-Track electro-hydraulic actuators feature the smallest mounting envelope in their class with a patented valve and reservoir design that provides significant space savings compared to competitive models. H-Track is a robust linear actuator providing force up to 4800 lbf (21350 N) and travel speeds near 4 in (100 mm) per second. With stroke lengths up to 12 in (300 mm), different piston end adapters and multiple configurations available, the H-Track offers a unique set of options for machine designers.

Made for Tough Conditions

H-Track actuators are weatherproof, dust tight, corrosion resistant, and tested for IP67 static (temporary submersion) and IP69K (high-pressure washdown). With the marine-grade motor option, it is also IP68 approved (tested for continuously submerged operation up to 2 m for 650 hours). The H-Track offers an optional operation temperature from as low as -40°F (-40°C) to as high as 180°F (82°C), making it an ideal option for applications in demanding conditions.



Completely Self-Contained

The motor, pump and valves are contained in one mini power pack mounted directly to the combined cylinder/fluid tank. This means that the inner workings are completely sealed from the outside, allowing this unique arrangement to minimize parts and improve performance. Unlike hydraulic cylinders, there is no need for external hoses, valves, reservoirs or hydraulic connectors that can break or leak. The operation is as simple as with a traditional electric actuator - just turn the supply voltage on to move and change polarity to reverse direction. If necessary, the actuator piston rod can be manually overridden, allowing the rod to float for operating in emergency situations.

THE BEST OF TWO WORLDS

ELECTRICALLY POWERED AND CONTROLLED

- SIMPLE TO CONTROL
- NO NEED FOR BULKY EXTERNAL HOSES, VALVES OR PUMPS
- MINIMAL RISK OF LEAKAGE
- MAINTENANCE FREE

HYDRAULIC MOTION

- HIGH POWER DENSITY
- HIGH SHOCK LOAD AND VIBRATION RESISTANCE
- SMOOTH MOTION
- QUIET OPERATION





Electro-Hydraulic Advantages

The best features from the electric and hydraulic actuator worlds have been chosen to power the H-Track linear actuator, giving it a unique set of capabilities that allow it to be used in applications that otherwise might be too difficult for other solutions to take on.

Compact Design

H-Track actuators have a mounting length that is shorter than any other electromechanical actuator on the market. It can fit into applications with a pin-to-pin length as small as 4.73 in (120 mm) plus its stroke, and still provide up to 3200 lbf (14234 N) of force.

Superb Load-Holding Power

H-Track actuators operate in both tension and compression and will hold a load stationary without power in either direction. Static load-holding capability will always exceed the dynamic load moving capability.

Vibration and Shock Load Resistant

H-Track actuators are immune to vibrational drifting, hydraulically self lock and safely absorb shocks.

Energy Efficient

Electric control provides clean, smooth linear motion without hydraulic plumbing or other expensive componentry. The H-Track's power demands are significantly less than those of a full hydraulic system as the actuators require power only when in motion.

Solid Piston

Since the piston is solid, it allows for increased resistance to buckling compared to a hollow piston rod of the same size.



Hydraulics Isolated from the Atmosphere

The fluid reservoir is vented and isolated from the atmosphere with a flexible lid, allowing actuator and pump operation in any orientation without entraining or cavitation.

Maintenance-Free

H-Track actuators require no lubrication, hydraulic fluid fillup, or any other type of maintenance or adjustments for their entire lifecycle.

Contamination-Free

The H-Track's pump is conditioned and flushed prior to vacuum-filling the completed actuator assembly with degassed hydraulic fluid. This ensures you enjoy contaminant-free performance for the life of the actuator.

Thoroughly Tested

Throughout their entire development process, H-Track actuators are rigorously tested to ensure they meet all relevant standards and performance specifications prior to leaving the factory. Please contact Thomson customer support to learn more about which standards H-Track meets and how our testing is carried out.

Customization

As with most Thomson products, H-Track actuators can be customized. Our engineers will work with you to determine the modifications needed – from a simple color change to a complete overhaul of the design. Thomson is a global leader in custom actuator production and takes pride in supplying the optimal solution to each customer.





Built to Perform

H-Track is built from the outside in to excel in situations where many other actuators are forced to bow out. The unique electro-hydraulic design combines the best features from two distinct systems and opens up new application possibilities for linear actuators.

MORE POWER IN LESS SPACE


H-Track is one of the strongest actuators for its size without compromising life expectancy or the ability to withstand the elements.

- 1 **Compact and strong power pack unit, containing pump, valves and motor**
- 2 **Fluid tank integrated into the cover tube**
- 3 **Solid small-diameter, buckling-resistant piston rod**

COMPLETELY SELF CONTAINED

Get the best from the electric and hydraulic worlds in one package. H-Track is powerful, tough, and vibration and shock load resistant. Yet it only needs a battery and a switch to run, requires no maintenance, and minimizes the risks and hazards associated with hydraulic fluid leaks.

- 4 **Power pack unit completely sealed from the outside**
- 5 **Two-wire operation**
- 6 **Large number of power pack and cylinder configurations allow for great design flexibility**

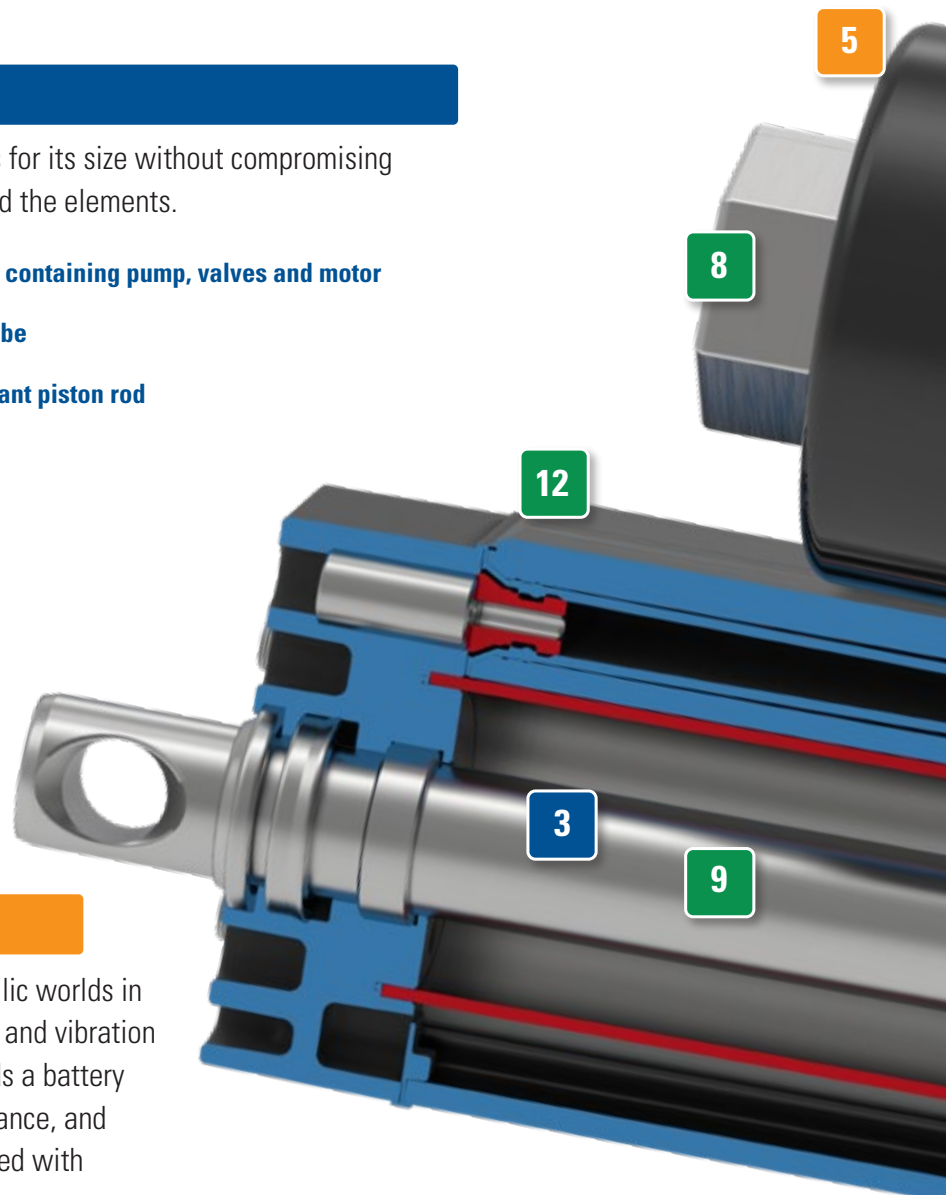

MADE FOR TOUGH CONDITIONS

H-Track is designed and tested to operate under the harshest conditions without failure or the need for maintenance.

7 Standard IP69K/IP67 protection class and tested for 2000 hours salt spray


8 IP68 and tested for 650 hours under water (marine-grade option)

9 Solid 316 stainless steel piston

10 Large operating temperature range

11 High shock load and vibration resistance

12 Anodized aluminum-alloy housing

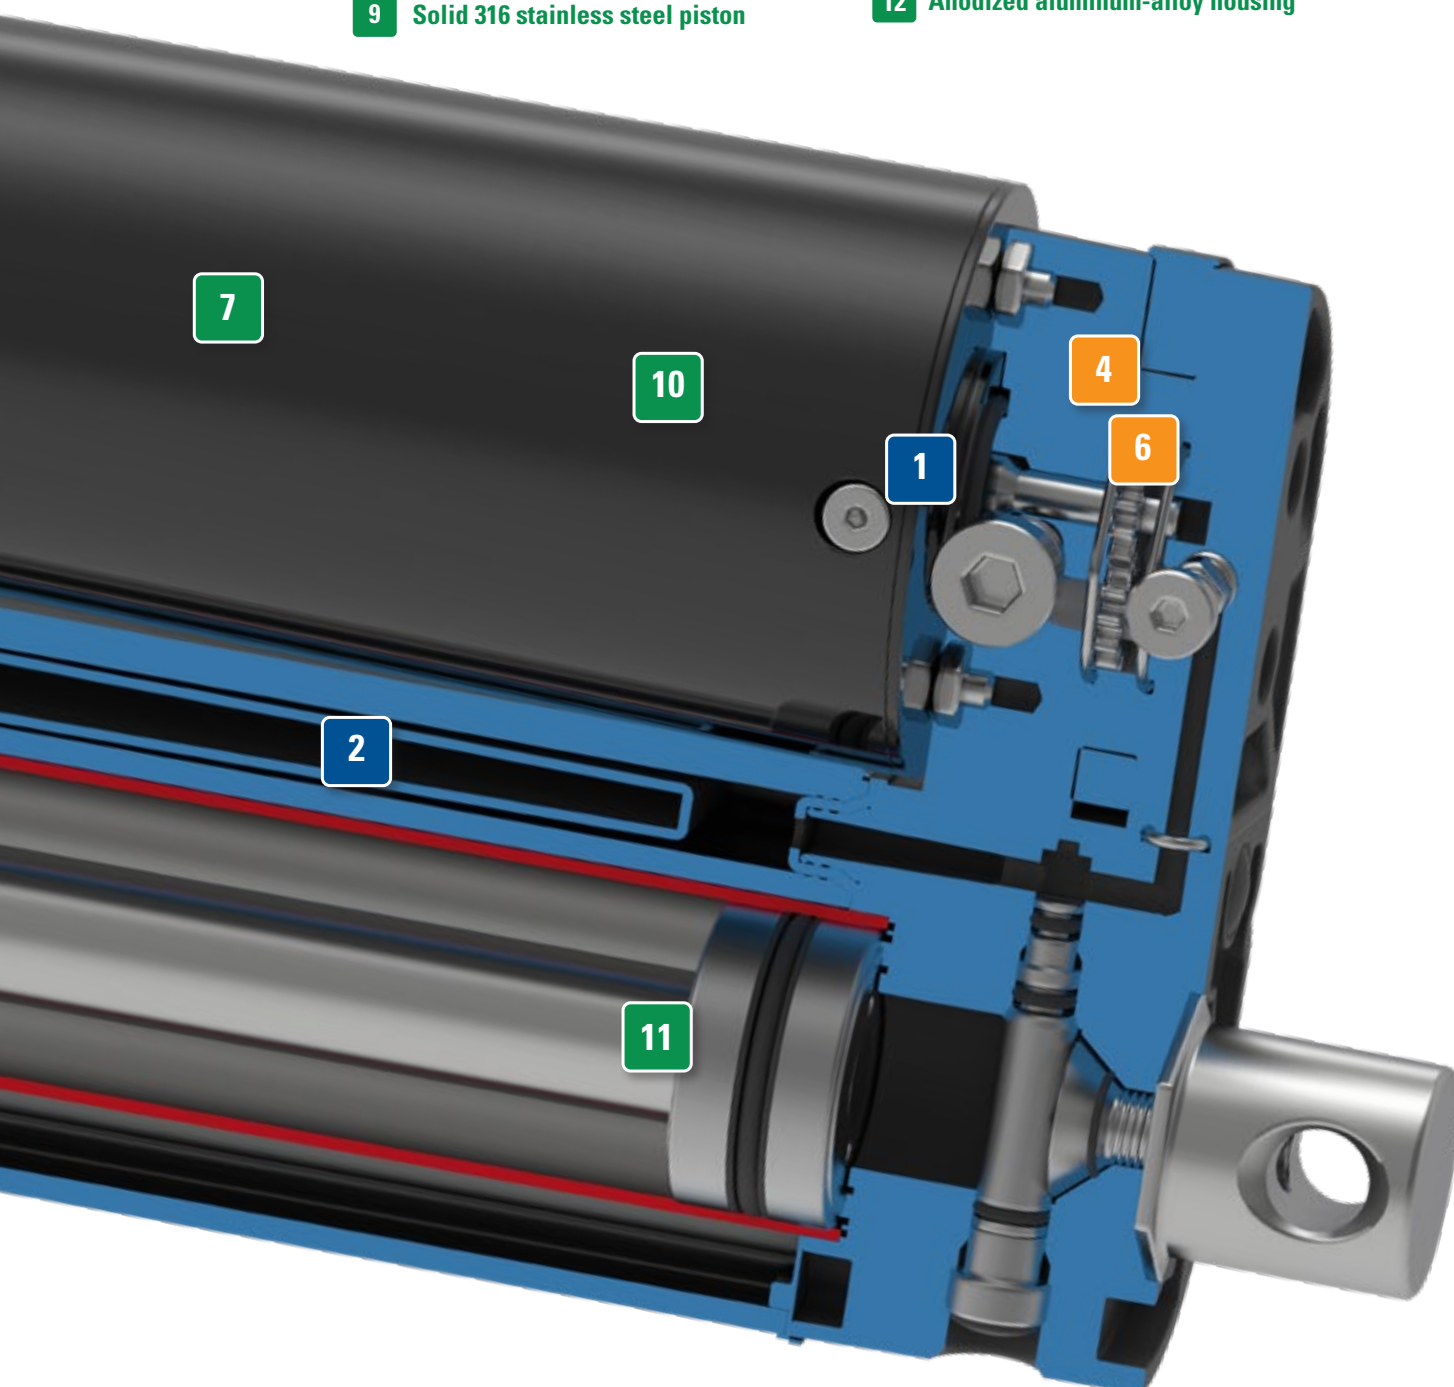




Built for the Toughest Applications

With a self-contained electro-hydraulic system, H-Track actuators meet the growing demand for power-dense performance used in a variety of industrial, agricultural and marine applications.

Designed to Withstand Life on the Fields

With agricultural sprayers becoming larger and boom lengths reaching up to 177 ft (54 m), strain on the actuators has increased exponentially. Actuators are used to fold the long sprayer booms from an extended position to a stowed position for transport. The folding and unfolding of these booms apply


very high loads on the actuators. The strain on the units is dramatically increased when the sprayer is in motion, and the bouncing of the booms causes even more extreme loads. These combined loads create tremendous impact force that can easily destroy most other electric actuators. The H-Track is designed to handle this type of loading with ease.

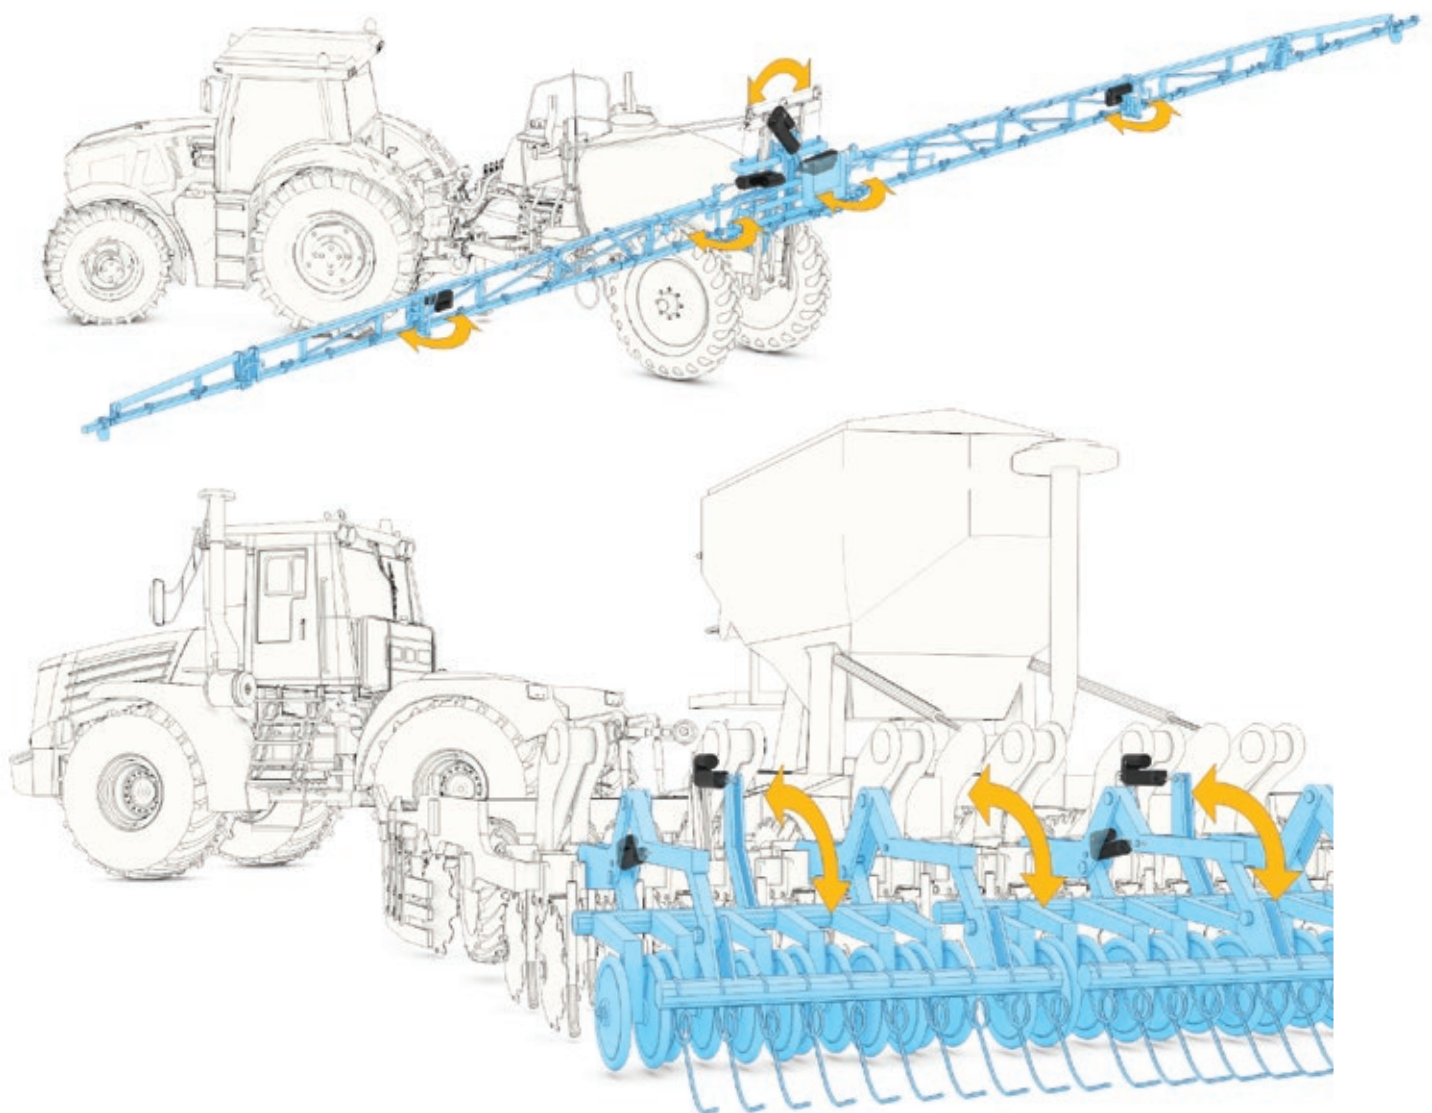

Ideal for Demanding Outdoor Applications

Where the often harsh outdoor environment creates conditions that can be fatal for most actuators, the H-Track thrives. A snow plow battling icy roads and striking a stationary, concrete object is an example that would quickly destroy most linear actuators. The H-Track's unique valve and reservoir design gives it the ability to cushion these blows and continue operating without issue. The optional ability to operate in temperatures as

low as -40°F (-40°C) makes it a perfect fit for even the coldest climates. Mower deck lifts are typically where electric actuators shine, but with increasing deck sizes and ground speeds, the limits of these traditional actuators are being exceeded. With its reliable, load-holding capabilities, enhanced durability for higher transport speeds, and the ability to withstand high-pressure washdowns, the H-Track is a perfect choice for the next generation of larger, faster mowers.

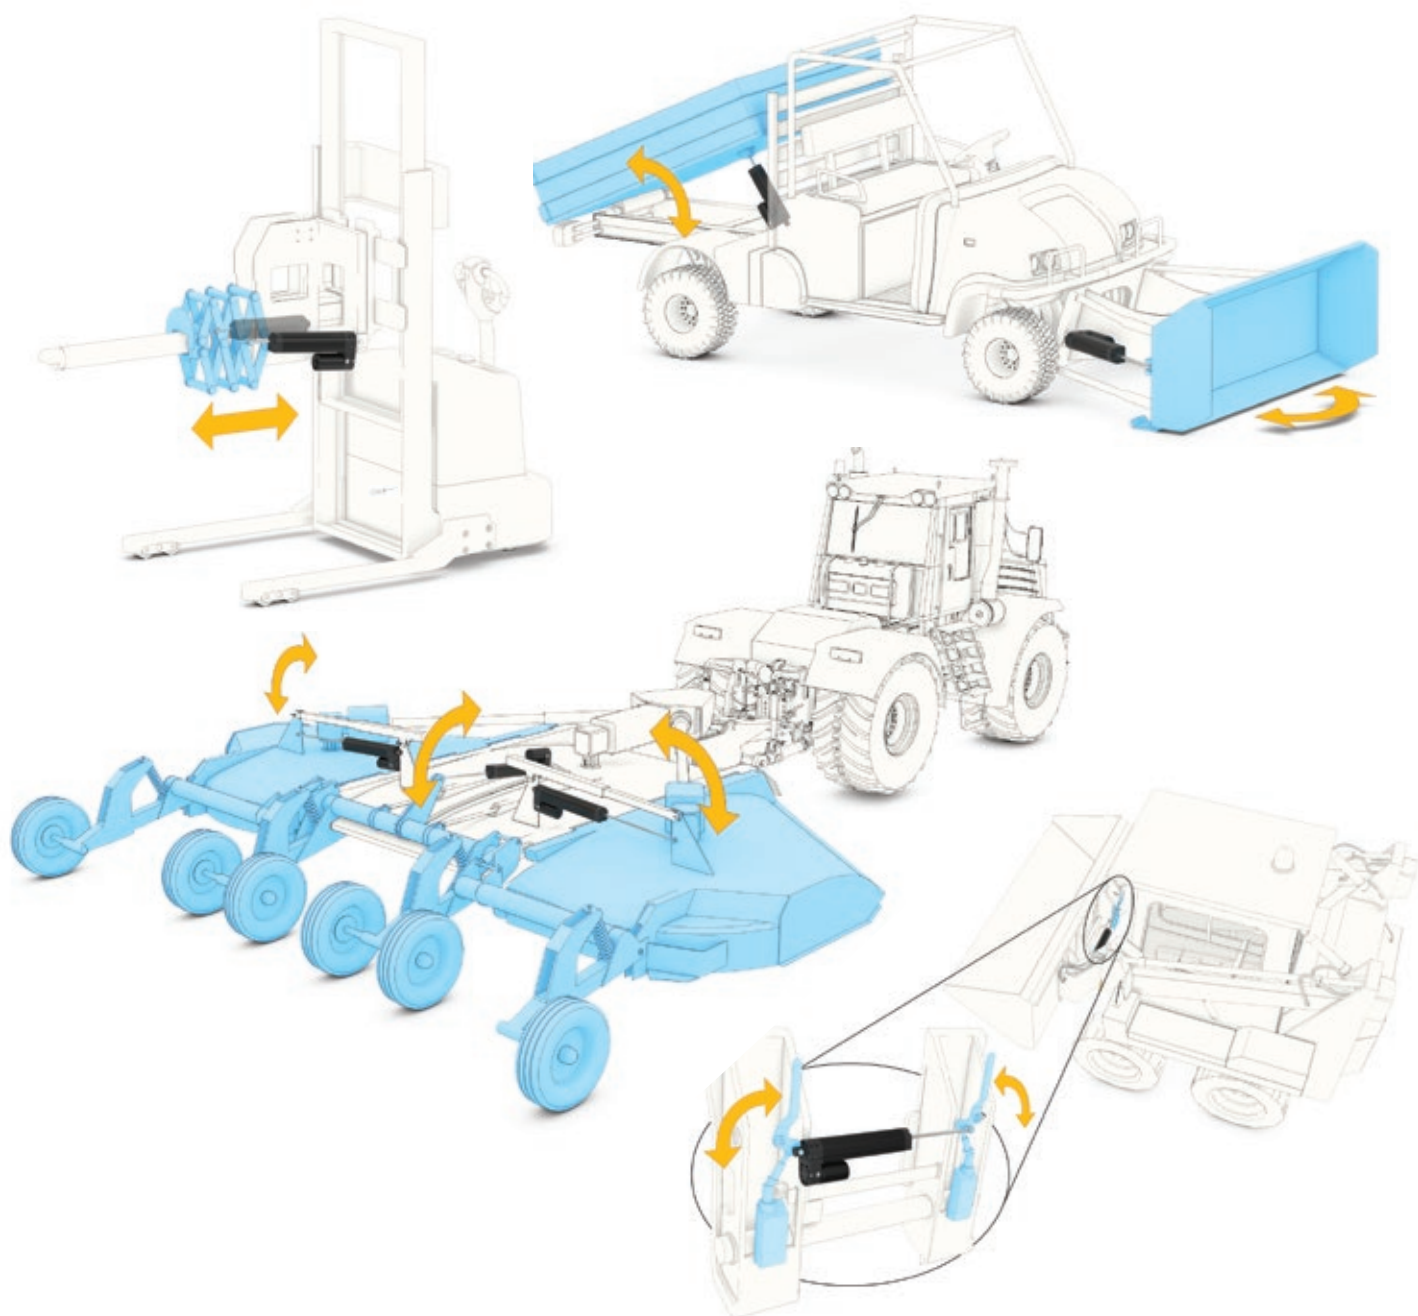



Marine-Grade Option Allows for Fully Submerged Operation

H-Track's marine-grade option earns it IP68 classification, meaning it can operate under water. Not only is this vital in marine applications, but it also eases design of any type of equipment that may be at risk of being submerged or flooded.

Marine Applications


Using H-Track with the IP68 marine-grade option brings several advantages compared to other solutions for underwater linear motion.

- Simple electrical control.
- The hydraulic system absorbs shocks and vibrations related to moving through water, waves and currents at different speeds and angles.
- No breather tubes are necessary.
- Easy installation with zero maintenance.

Other Underwater Applications

H-Track is the answer to many linear motion applications that need to be able to operate underwater occasionally or permanently - a need that few to none of today's standard solutions can fulfill.

- Equipment in cellars, wells or water tanks.
- Water treatment plants.
- Irrigation control applications.
- Small-scale hydro-power plants.
- Process machinery to control flow or hatches.
- Sewage and draining applications.
- Boat trailers and other waterfront vehicles.
- Loading docks that are susceptible to flooding.

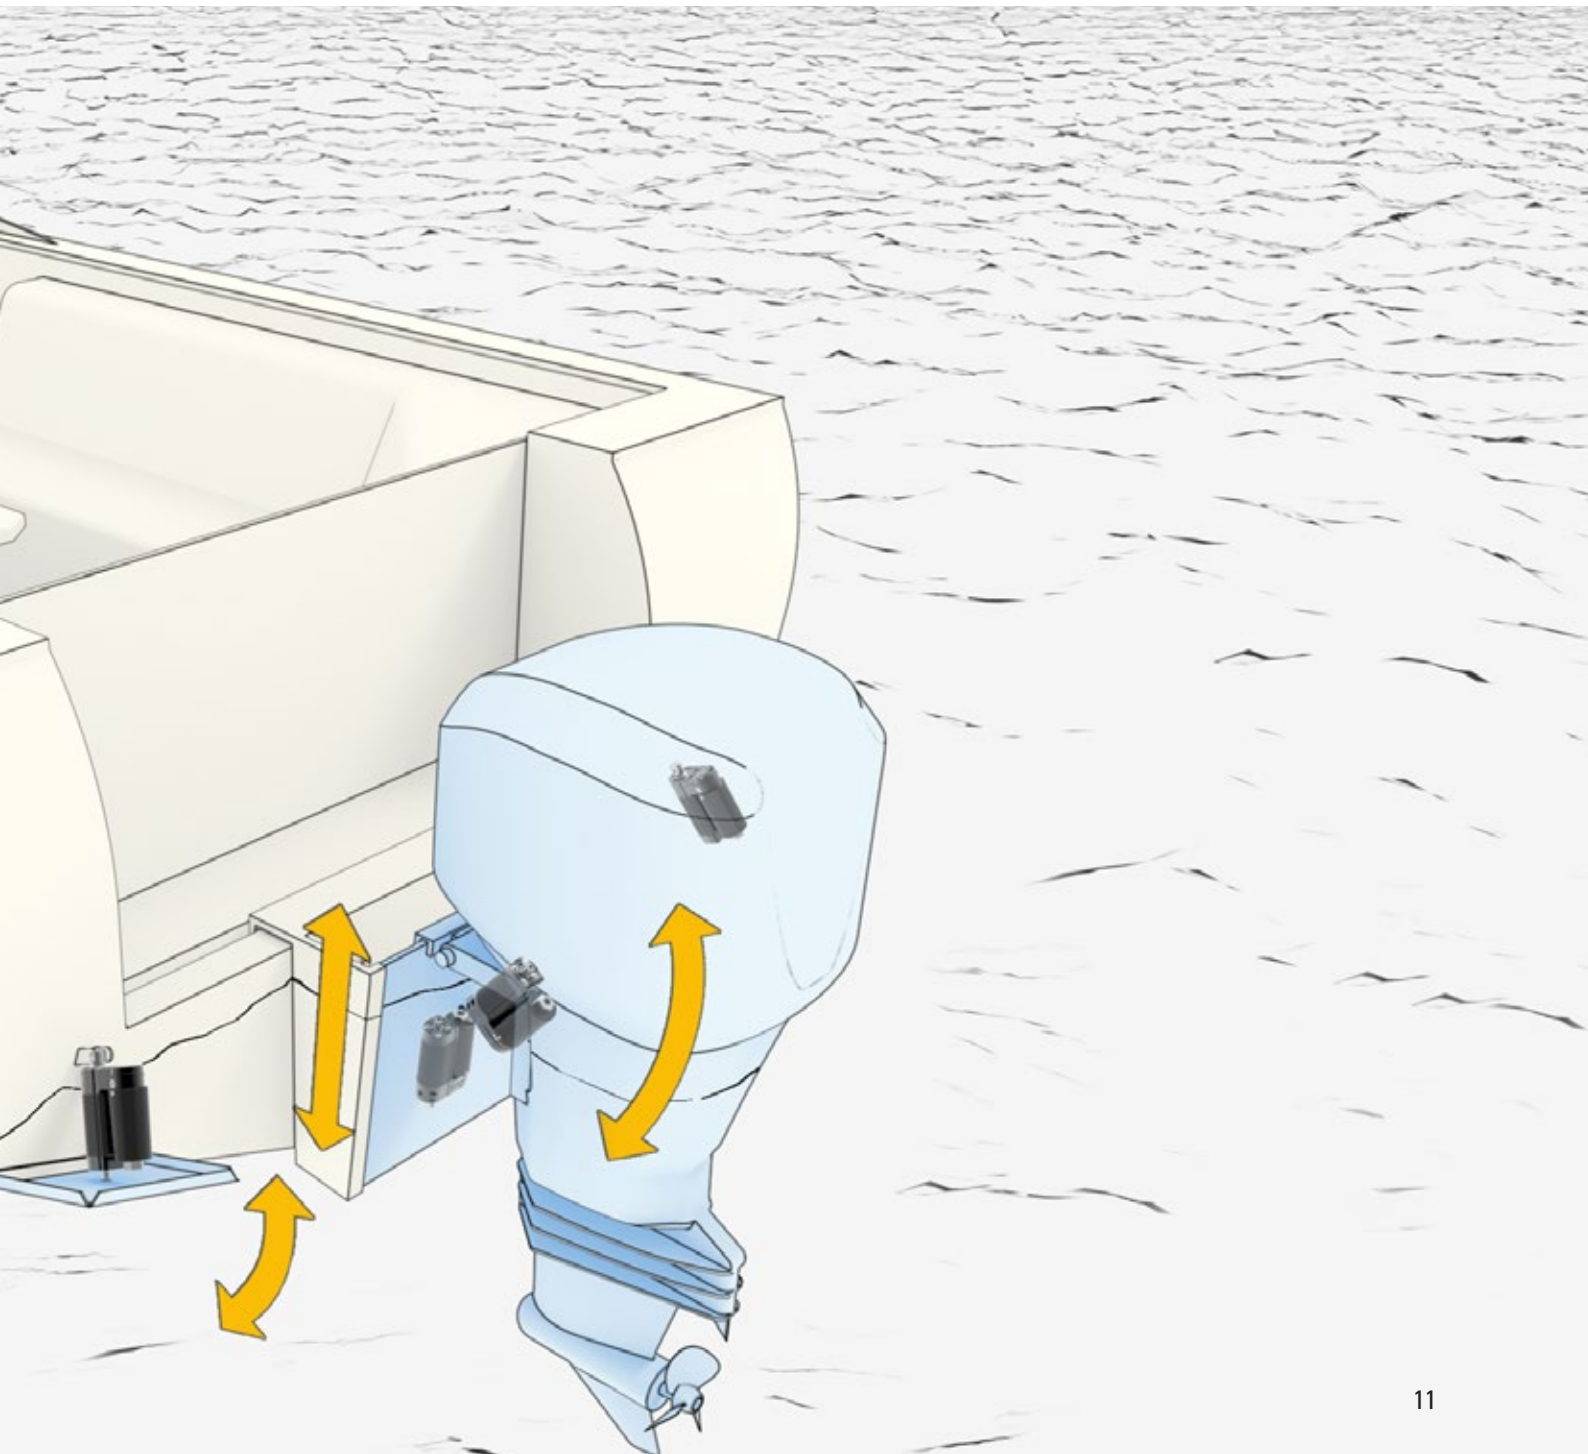



Technical Features



H-Track Electro-Hydraulic Linear Actuator

- Combines the best from the hydraulic and electric worlds.
- High power density.
- Very compact and short pin-to-pin versus stroke length relationship.
- Solid piston rod allows for increased resistance to buckling.
- Immune to vibrational drifting and hydraulically self locks.
- High shock load and vibration resistance.
- Fluid reservoir is vented and isolated from the atmosphere with a flexible lid, allowing actuator and pump operation in any orientation without entraining or cavitation.
- Standard strokes up to 12 in (300 mm).
- Designed for harsh outdoor conditions.
- IP68 marine-grade option for both static and dynamic operation.
- Reliable and maintenance free.

General Specifications

Cylinder type	hydraulic
Pump type	internal electric gear pump
Manual override	yes
Anti-rotation	no
Motor protection	built-in auto reset thermal switch
Static load holding brake	no (self-locking)
Pressure relief valve	yes (for both directions)
Electrical connections	
Motor size 1	flying leads + Packard 56 male connector
Motor size 2	flying leads + ring terminals
Motor size 3	flying leads + sealed IP67 rated Metri-pack 280 male connector
Compliance	CE, RoHs, REACH, Prop65

Optional Features

Mechanical options	IP68 marine-grade option
	Alternative front adapter ends
	Alternative rear adapter orientation

Technical Specifications

Mechanical Specifications		
Max. static compression load (Fx)	[lbf (N)]	5000 (22241)
Max. dynamic load (Fx)	[lbf (N)]	see page 18
Speed retract @ no load/max. load	[in/s (mm/s)]	see page 18
Speed extend @ no load/max. load	[in/s (mm/s)]	see page 18
Min. ordering stroke (S) length	[in]	2
Max. ordering stroke (S) length	[in]	12
Ordering stroke length increments	[in]	2
Operating temperature limits ^{(1) (2)}	[F (°C)]	-20 – 150 (-26 – 65)
Full load duty cycle @ 25 °C (77 °F)	[%]	25
End play, maximum	[in (mm)]	0.015 (0.4)
Restraining torque	[lb-in (Nm)]	0.89 (0.1)
Standard protection class - static		IP67/IP69K
Standard protection class - dynamic		IP65
Optional marine grade protection class - static and dynamic ⁽³⁾		IP68
Salt spray resistance ⁽⁴⁾	[h]	2000
Weight	[lb (kg)]	see page 15

1) Other limits possible, contact Thomson customer support for information.

2) H-Track can withstand air temperatures below the freezing point but must be protected from freezing while submerged in water.


3) Tested for 650 hours of submerged operation up to a depth of 2 meters (79 in) at rated duty cycle.

4) Tested per ASTM B117 (salt fog exposure for a duration of 2000 hours).

Electrical Specifications

Available input voltages	[Vdc]	12, 24
Input voltage tolerance	[Vdc]	
12 Vdc models		9 – 16
24 Vdc models		18 – 32
Current draw min/max	[A]	see page 18
Motor leads cross section	[AWG (mm²)]	
Motor size 1 and 3		14 (2)
Motor size 2		12 (3)
Motor ring terminals cross section	[AWG (mm²)]	
Motor size 1 and 3		-
Motor size 2		10
Motor lead length, standard	[in (mm)]	10 (254)

Electrical Connections

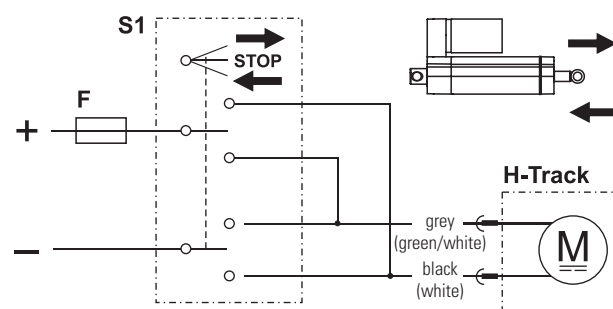


F Fuse

S1 Double pole double throw switch

To extend the actuator, apply +Vdc to black (white) and -Vdc to grey (green/white). To retract, apply -Vdc to black (white) and +Vdc to grey (green/white). Colors in between brackets are valid for motor size 2. Avoid running the actuator into the ends.

Dimensions

Dimensions	Projection
inch [mm]	

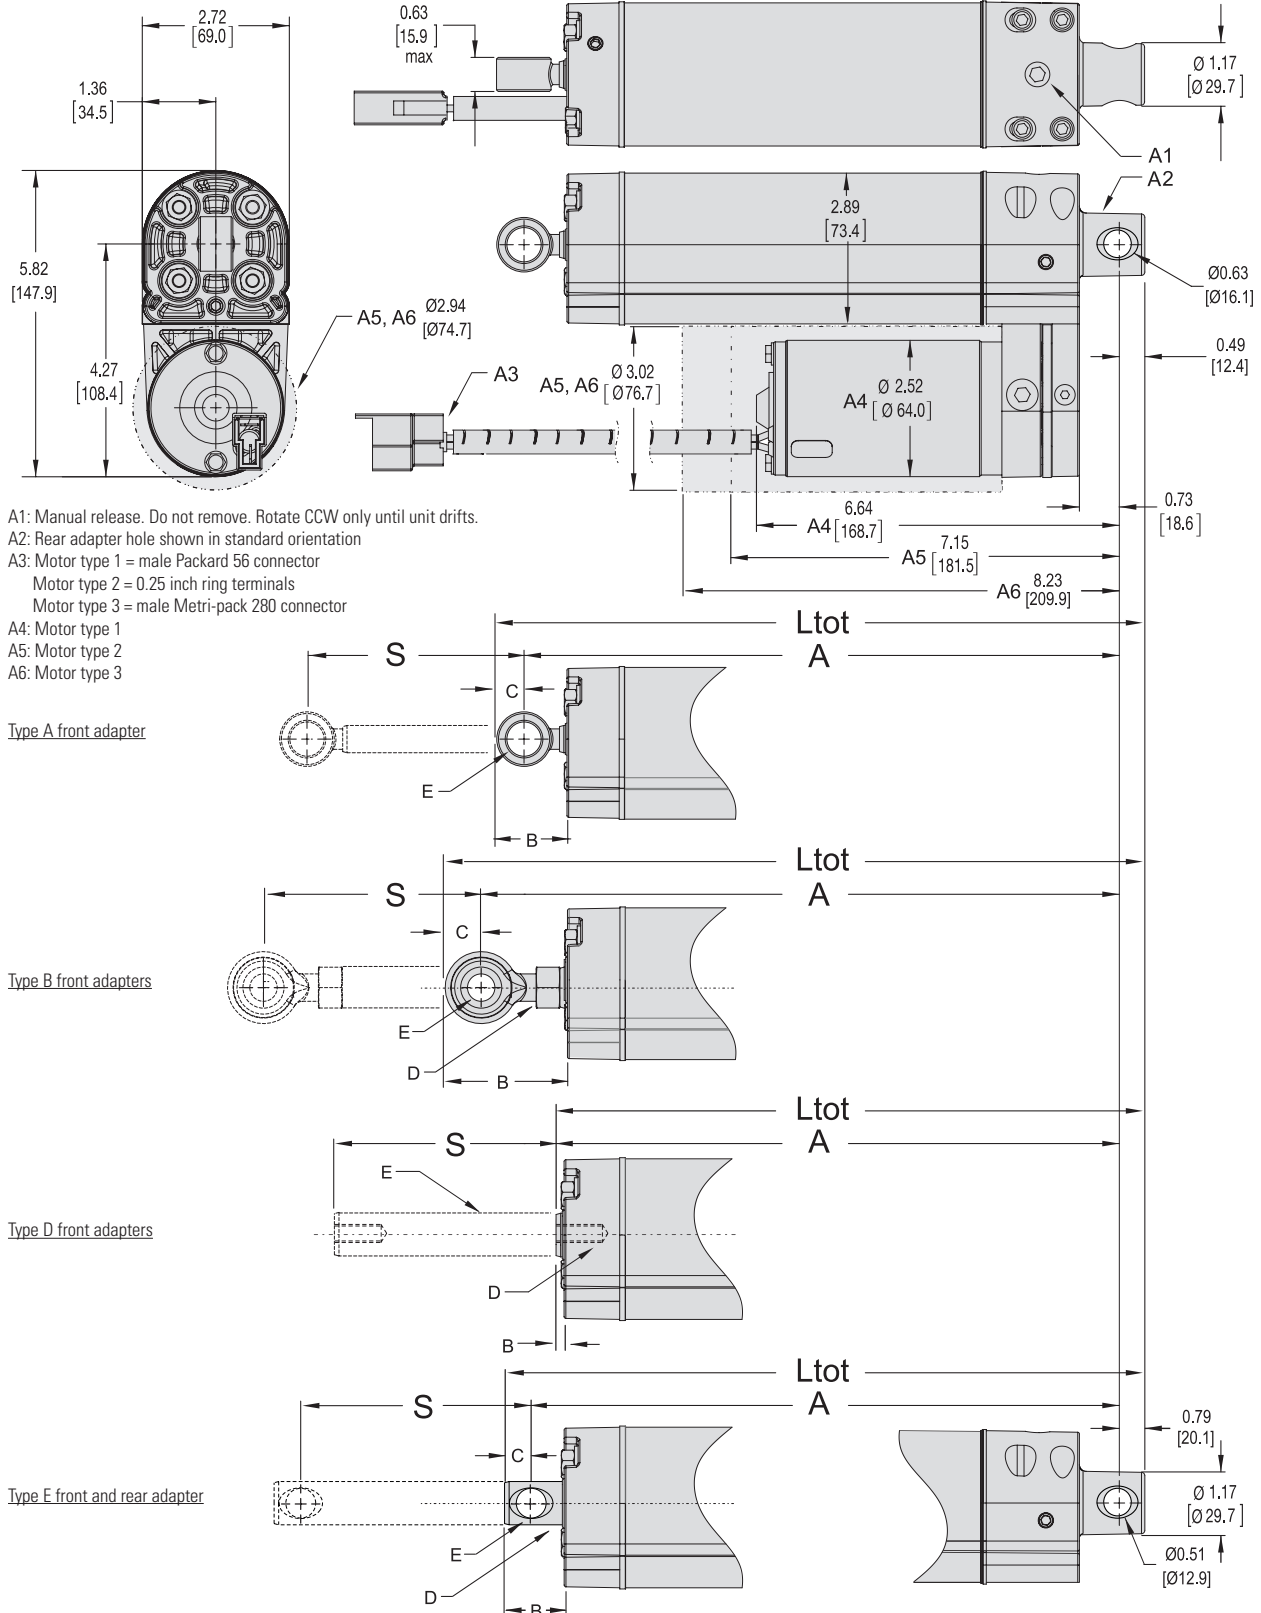

Dimensions

Dimensions [in (mm)]				
Front Adapter	Type A	Type B	Type D	Type E
Standard Ordering Strokes (S) [in]	2, 4, 6, 8, 10, 12			
Total Length (Ltot)	Ltot = A + C + 0.49 (12.4)	Ltot = A + C + 0.49 (12.4)	Ltot = A + 0.49 (12.4)	Ltot = A + 0.46 (11.7)
Retracted Length (A) Bore Size H2 Bore Size H3	A = S + 4.8 (121.9) A = S + 4.8 (121.9)	A = S + 5.4 (137.2) A = S + 5.7 (144.8)	A = S + 4.2 (106.7) A = S + 4.2 (106.7)	- A = S + 4.7 (119.4)
Dimension B Bore Size H2 Bore Size H3	1.31 (33.3) 1.31 (33.3)	1.66 (42.2) 1.89 (48.0)	0.14 (3.6) 0.14 (3.6)	- 1.03 (26.2)
Dimension C Bore Size H2 Bore Size H3	0.52 (13.2) 0.52 (13.2)	0.56 (14.2) 0.66 (16.8)	- -	- 0.46 (11.7)
Dimension D Bore Size H2 Bore Size H3	- -	7/16-20 THREADS 1/2-20 THREADS	7/16-20 THREADS 1/2-20 THREADS	- Ø 0.75 (19.0)
Dimension E Bore Size H2 Bore Size H3	Ø 0.631 (16.0) Ø 0.631 (16.0)	Ø 0.44 (11.2) THRU Ø 0.50 (11.2) THRU	Ø 0.625 (15.9) Ø 0.750 (19.0)	- Ø 0.51 (13.0)

Weight

Actuator Weight [lb (kg)]						
Actuator Type	Ordering Stroke (S) [in]					
	2	4	6	8	10	12
H2x-xx-1	6.9 (3.1)	7.8 (3.5)	8.7 (3.9)	9.6 (4.4)	10.5 (4.8)	11.4 (5.2)
H3x-xx-1	7.1 (3.2)	8.2 (3.7)	9.3 (4.2)	10.4 (4.7)	11.5 (5.2)	12.6 (5.7)
H2x-xx-2	8.5 (3.9)	9.4 (4.3)	10.3 (4.7)	11.2 (5.1)	12.1 (5.5)	13.0 (5.9)
H3x-xx-2	8.7 (3.9)	9.8 (4.4)	10.9 (4.9)	12.0 (5.4)	13.1 (5.9)	14.2 (6.4)
H2x-xx-3	9.3 (4.2)	10.2 (4.6)	11.1 (5.0)	12.0 (5.4)	12.9 (5.8)	13.9 (6.3)
H3x-xx-3	9.5 (4.3)	10.6 (4.8)	11.7 (5.3)	12.8 (5.8)	13.9 (6.3)	15.0 (6.8)



Ordering Key

Ordering Key								
1	2	3	4	5	6	7	8	9
H2	C-	12-	1	A2	2	-A	06	
1. Bore size ⁽¹⁾ H2 = 1.375 in H3 = 1.500 in 2. Load configuration ⁽¹⁾ N- = the piston rod is not influenced by external loading, with no external force driving it in or out of the actuator C- = external loading exerts a continuous force, driving the piston rod into the actuator H- = external loading exerts a continuous force, drawing the piston rod out of the actuator 3. Input voltage ⁽¹⁾ 12- = 12 Vdc 24- = 24 Vdc 4. Motor size and protection class ⁽¹⁾ 1 = 2.5 inch diameter, standard IP67/IP69K 2 = 3.0 inch diameter, standard IP67/IP69K 3 = 3.0 inch diameter, marine grade IP68 option ⁽²⁾ 5. Pump size ⁽¹⁾ B0 = 0.012 in ³ /rev B2 = 0.025 in ³ /rev B4 = 0.040 in ³ /rev					6. Piston diameter 2 = 0.625 in (always with bore size H2) 3 = 0.750 in (always with bore size H3) 7. Adapter type -A = Standard -B = Spherical -D = Female Thread -E = Cross hole ⁽³⁾ 8. Stroke length ⁽³⁾ 02 = 2 in (50 mm) 04 = 4 in (100 mm) 06 = 6 in (150 mm) 08 = 8 in (200 mm) 10 = 10 in (254 mm) 12 = 12 in (300 mm) 9. Rear adapter orientation blank = standard R90 = 90° position (1) See page 23 for sizing and selection guidelines (2) Motor option 3 not available for 24 Vdc (3) Cross hole not available with bore size H2 or motor type 2 (4) Other stroke lengths available upon request. Please contact customer support.			



Performance Matrix

There are three main types of load configurations (N,C and H), which will determine the performance of the H-Track and how to interpret the below table. See the next page for information on the configurations and their effects.

Performance Matrix ⁽¹⁾										
Model	Max. Dynamic Load [lbf (N)]		Extend Speed [in/s (mm/s)]		Retract Speed [in/s (mm/s)]		Current Draw [A] ⁽²⁾			
	Extending	Retracting	@ No. Load	@ Max. Load	@ No. Load	@ Max. Load	12 Vdc Input Voltage		24 Vdc Input Voltage	
							Max.	Min.	Max.	Min.
Motor Type 1 (standard 2.5 inch diameter motor)										
H2x-xx-1B42	950 (4226)	750 (3336)	1.90 (48.3)	0.53 (13.5)	2.29 (58.2)	0.64 (16.3)	42	8	22	5
H3x-xx-1B43	1100 (4893)	825 (3670)	1.60 (40.6)	0.47 (11.9)	2.00 (50.8)	0.59 (15.0)	42	8	22	5
H2x-xx-1B22	1400 (6228)	1100 (4893)	1.20 (30.5)	0.34 (8.6)	1.45 (36.8)	0.41 (10.4)	42	8	22	5
H3x-xx-1B23	1750 (7784)	1300 (5783)	1.00 (25.4)	0.29 (7.4)	1.25 (31.8)	0.36 (9.1)	42	8	22	5
H2x-xx-1B02	2400 (10676)	1750 (7784)	0.50 (12.7)	0.15 (3.8)	0.60 (15.2)	0.18 (4.6)	42	8	22	5
H3x-xx-1B03	3200 (14234)	2400 (10676)	0.45 (11.4)	0.13 (3.3)	0.56 (14.2)	0.16 (4.1)	42	8	22	5
Motor Type 2 (standard 3 inch diameter motor)										
H2x-xx-2B42	1425 (6339)	1131 (5031)	1.90 (48.3)	0.53 (13.5)	2.29 (58.2)	0.64 (16.3)	80	14	43	10
H3x-xx-2B43	1650 (7340)	1238 (7340)	1.60 (40.6)	0.47 (11.9)	2.00 (50.8)	0.59 (15.0)	80	14	43	10
H2x-xx-2B22	2100 (9341)	1666 (7411)	1.20 (30.5)	0.34 (8.6)	1.45 (36.8)	0.41 (10.4)	80	14	43	10
H3x-xx-2B23	2625 (11677)	1969 (8759)	1.00 (25.4)	0.29 (7.4)	1.25 (31.8)	0.36 (9.1)	80	14	43	10
H2x-xx-2B02	3750 (16681)	2975 (13233)	0.50 (12.7)	0.15 (3.8)	0.60 (15.2)	0.18 (4.6)	80	14	43	10
H3x-xx-2B03	4800 (21351)	3600 (16014)	0.45 (11.4)	0.13 (3.3)	0.56 (14.2)	0.16 (4.1)	80	14	43	10
Motor Type 3 (marine grade motor)										
H2x-12-3B42	730 (3247)	625 (2780)	1.25 (31.8)	0.35 (8.9)	1.51 (38.4)	0.42 (10.7)	30	4	-	-
H3x-12-3B43	850 (3781)	684 (3043)	1.05 (26.7)	0.31 (7.9)	1.32 (33.5)	0.39 (9.9)	30	4	-	-
H2x-12-3B22	1079 (4780)	920 (4092)	0.90 (22.9)	0.26 (6.6)	1.09 (27.7)	0.31 (7.9)	30	4	-	-
H3x-12-3B23	1350 (6005)	1088 (4840)	0.75 (19.0)	0.22 (5.6)	0.94 (23.9)	0.27 (6.9)	30	4	-	-
H2x-12-3B02	1850 (8229)	1450 (6450)	0.65 (16.5)	0.31 (7.9)	0.81 (20.6)	0.38 (9.7)	30	4	-	-
H3x-12-3B03	2250 (10008)	1675 (7451)	0.55 (14.0)	0.26 (6.6)	0.71 (18.0)	0.34 (8.6)	30	4	-	-


1) The table above is valid for the temperature span of 40 – 120°F (4 – 50°C). H-Track can operate in the larger range of -20 – 150°F (-26 – 65°C), but at temperatures below 40°F (4°C), force and current begin to increase, while speed decreases. At temperatures above 120°F (50°C), speed will decrease slightly. The exact amount of performance change is difficult to calculate. Also, when it comes to the lower temperature span, the performance will move towards what is stated above as the temperature rises in the actuator due to the heat generated by its work. Please consult Thomson customer service for more information.

2) The current draw is not linear to the load but depends on and varies with the load configuration, direction of travel, ambient temperature, internal actuator temperature, and can not be easily determined for a specific situation. The above given max. and min. current draw is the highest respectively the lowest current draw you can expect during operation, and is what the power supply must be dimensioned for. Please consult Thomson customer service for more information.

Load Configuration

Configuration N


The piston rod is not influenced by external loading, with no external force driving it in or out of the actuator. Current draws are at maximum extending or retracting when the resistive load is at the maximum stated value.

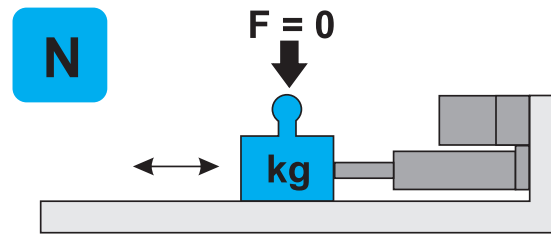

Configuration N: gravity does not affect the load in any direction.

Configuration C


External loading exerts a continuous force, driving the piston rod into the actuator. Current draws are at maximum while extending when opposing load is at maximum stated value. The current draw is between maximum and minimum while retracting the load. The current draw can be near the stated maximum value when retracting with no load.

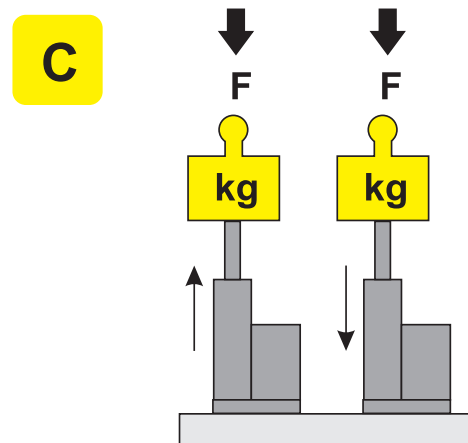

Configuration C: load is always acting to drive the piston rod into the actuator.

Configuration H

External loading exerts a continuous force, drawing the piston rod out of the actuator. Current draws are at maximum while retracting when the opposing load is at maximum stated value. Current draw is between maximum and minimum while extending a helping-load. Current draw can be near the stated maximum value when extending with no load.

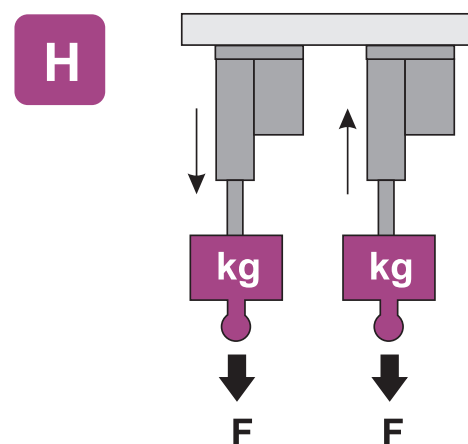

Configuration H: load is always acting to draw the piston rod out of the actuator


Caution: proper selection of Load Configuration is critical. Improper selection can result in unexpected performance.



Bore Size


The maximum load in each direction and the required stroke length determine the minimum bore size needed for the actuator, which in turn, governs the piston diameter of the actuator.

Stroke vs. Load and Bore Size

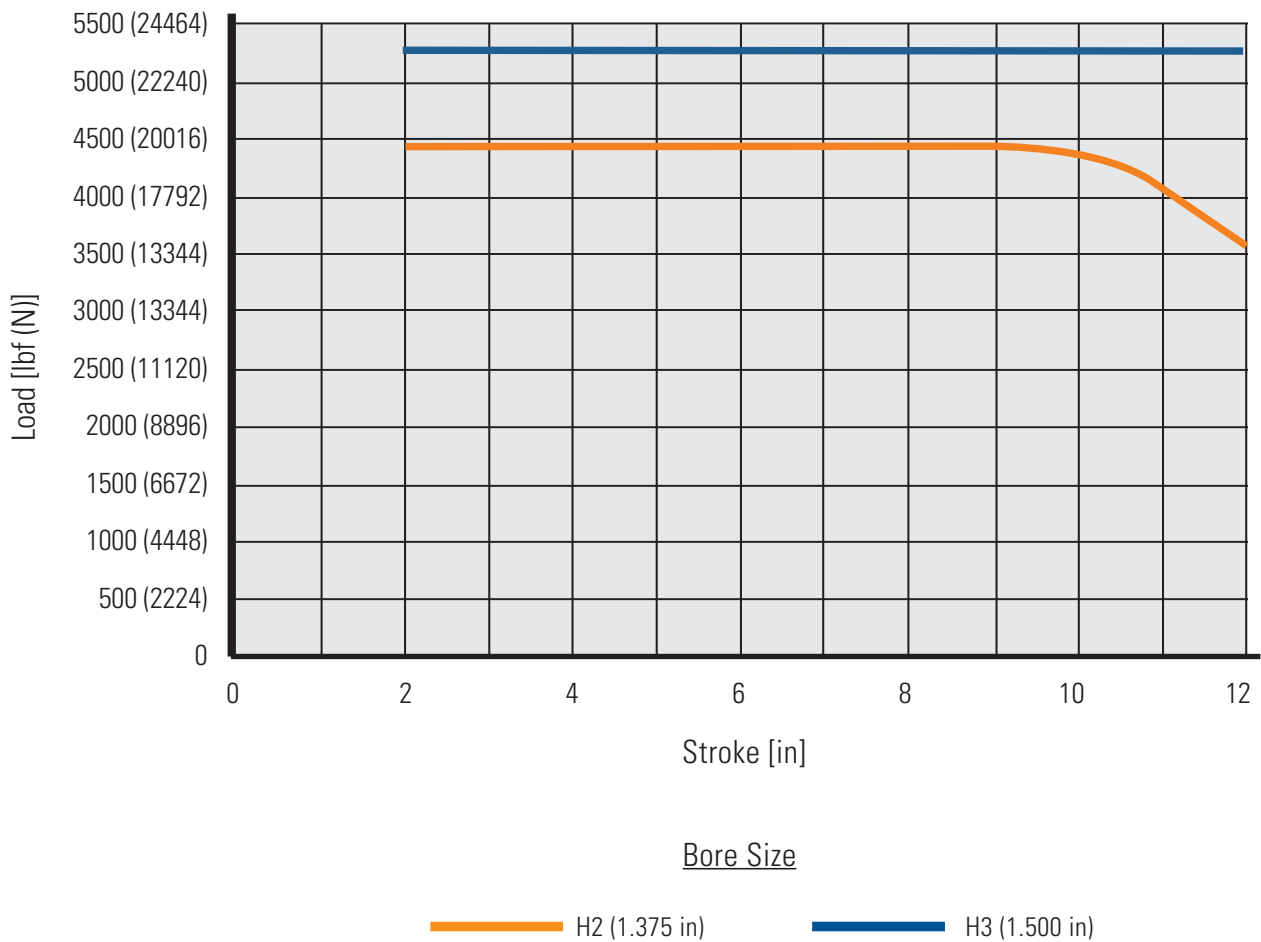


Motor and Pump Performance


Motor Type 1 - Load vs. Speed @ Extension / Retraction

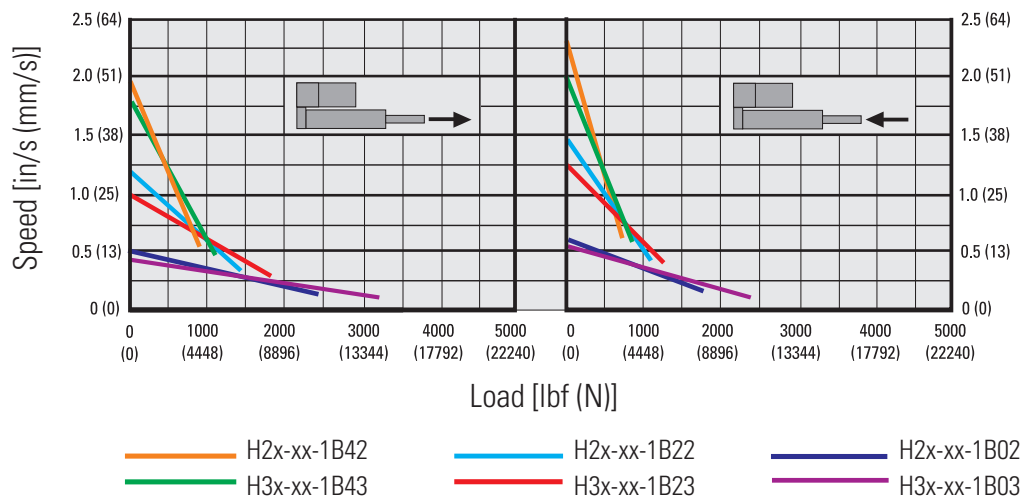

Motor Type 2 - Load vs. Speed @ Extension / Retraction

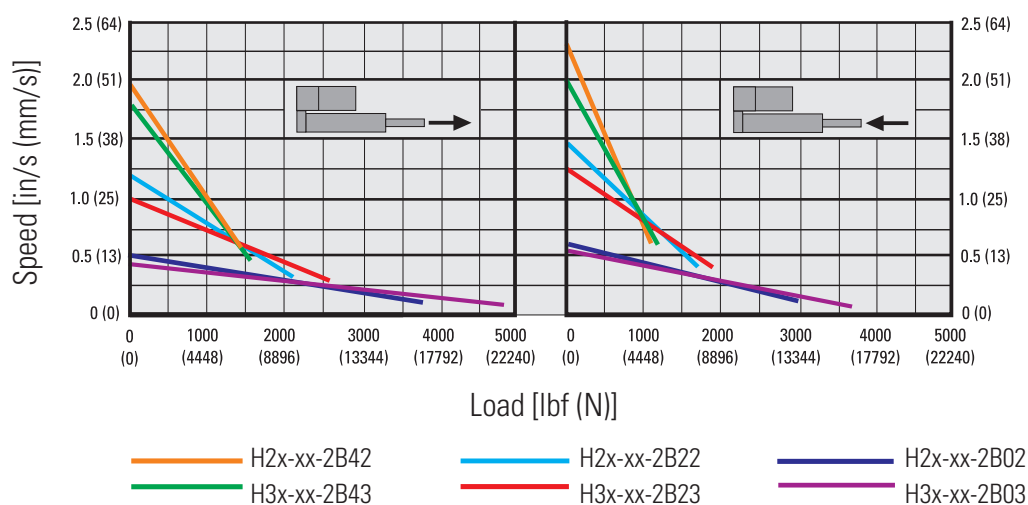

Motor Type 3 - Load vs. Speed @ Extension / Retraction

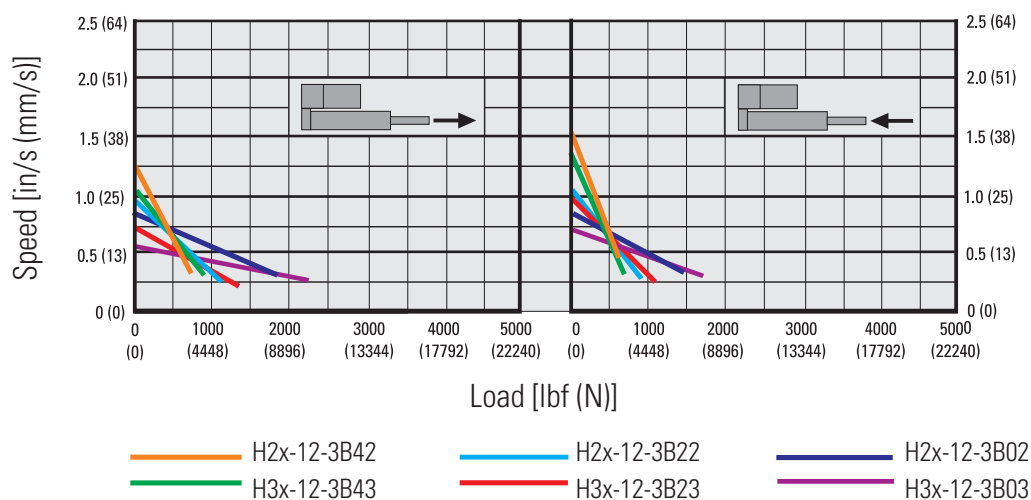

Sizing and Selection

In order to choose the optimal H-Track actuator for your application, please follow the sizing and selection process as described below. Do not hesitate to contact Thomson customer support if you need assistance.

Step 1. Collect the Necessary Application Data


In the following example, the application requirements are:

Stroke:	12 in
Max. load @ extension:	3750 lbf
Max. load @ retraction:	2000 lbf
Min. speed @ extension:	0.10 in/sec
Min. speed @ retraction:	0.25 in/sec
Input voltage:	24 Vdc
Protection class:	IP67
Type of load:	the load is pushed and pulled horizontally

Step 2. Bore and Piston Sizing

Determine the bore size (which also gives you the piston diameter) for your load and stroke. Also see page 20.

Example: As the application requires a 12-in stroke, that can handle 3750 lbf at extension (red dot) and 2000 lbf at retraction (yellow dot), then the Stroke vs. Load and Bore Size diagram below shows, that only the blue curve is above both points. Therefore, bore size H3 is the only possible choice in this case (which also means the piston diameter will be 0.750 in).

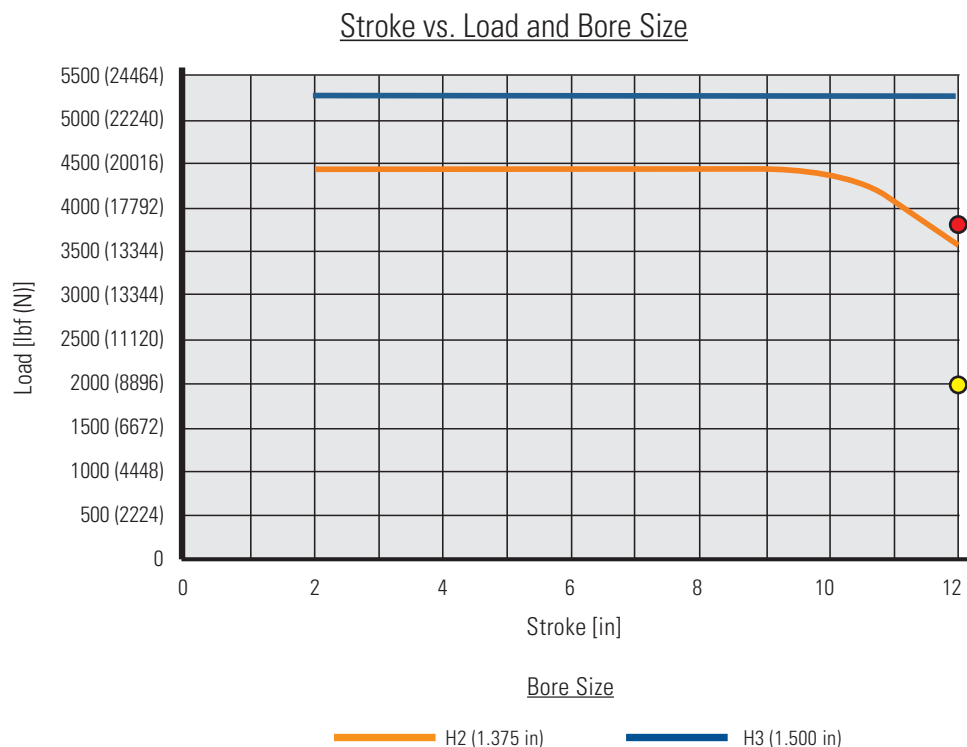


Sizing and Selection

Step 3. Sizing of Motor and Pump

Determine the size of the motor and pump for your application using the performance diagrams on page 21.

Example: The combined IP67 and 24 Vdc input voltage requirements directly rules out motors of type 3 since they are available for 12 Vdc only. Next, looking at the diagrams for motor types 1 and 2 shows that only the type 2 diagrams have motors capable of handling the required 3750 lbf extension load. Placing the maximum extension (red arrow) and retraction loads (yellow arrow), plus the desired extension (green arrow) and retraction (blue arrow) speeds in the type 2 diagram show that there are two motor sizes capable of handling both the loads and speeds (H2x-xx-2B02 and H3x-xx-2B03). However, the only possible choice is H3x-xx-3B02 since it has the required H3 bore size. Hence the ordering code at this stage reads H3x-24-3B02-x-12x.

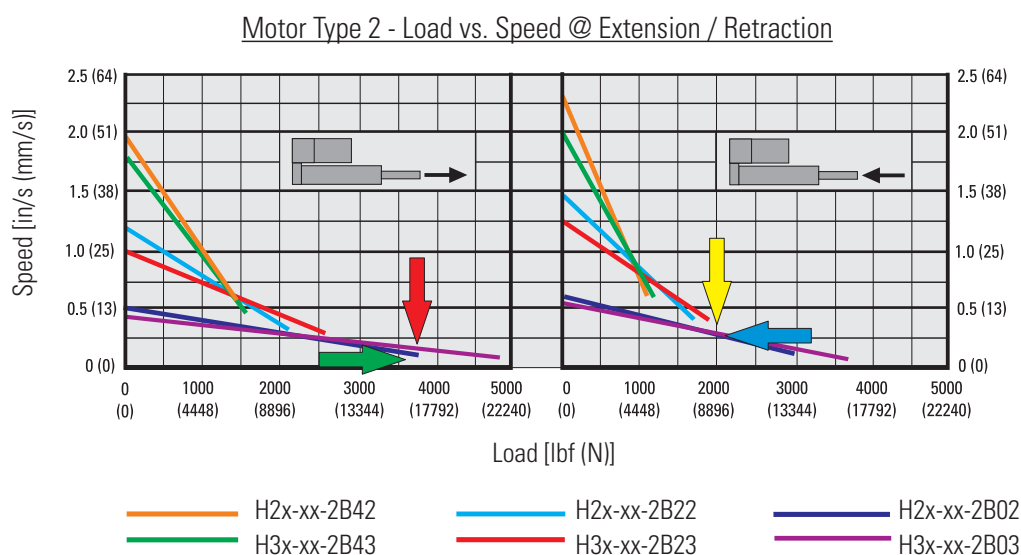

Step 4. Current Draw

The Performance Matrix on page 18 shows that model H3x-24-2B03 will draw up to 43 A and never less than 10 A (since it has 24 Vdc input voltage). The power supply will need to be dimensioned accordingly.

Step 5. Load Configuration

Choosing the correct load configuration for the actuator is critical for proper operation and will also determine the current consumption profile during operation. Also see page 19.

Example: Since the load is pushed and pulled horizontally, the corresponding load configuration is N, and current draws will therefore be at maximum at extension or retraction when the opposing load is at the maximum stated value. The ordering code at this stage now reads H3N-24-2B03-x-12x.

Step 6. Finishing the Ordering Code

In order to complete the ordering code, the type of piston rod front adapter and the rear adapter orientation need to be added to the code. Also see page 17.

Example: If we assume a standard front adapter and a 90° rear adapter orientation are required, the complete ordering code would be H3N-24-2B03-A-12R90.